


REPLACEMENT

1. REMOVE EV CHARGE PORT

- (a) Disconnect the charge port connector.
- (b) Turn the tighten ring counterclockwise, and disconnect port connector from the receptacle.
- (c) Remove the 2 nuts, 2 bolts and charge port assembly.

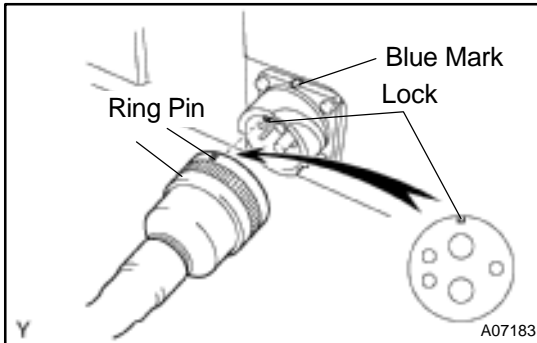

2. REINSTALL EV CHARGE PORT

- (a) Install the charge port assembly with the 2 nuts and 2 bolts.

Torque: 5.0 N·m (51 kgf·cm, 44 in.-lbf)

- (b) Align the locks of the receptacle and port connector, turn the tighten ring clockwise, and connect the port connector.
- (c) The tighten ring pin locks with a click when it comes slightly after the blue mark (a detent).
- (d) Connect the charge port connector.